



TZ9555

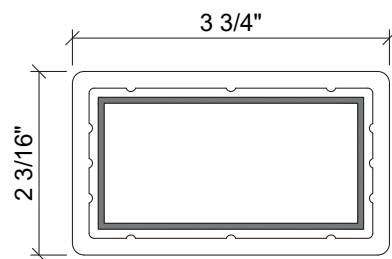

TZ9555

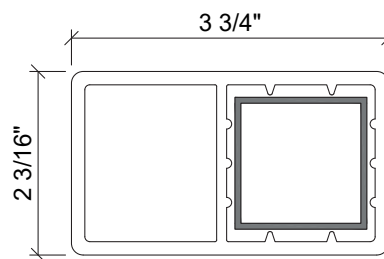

TZ9555-R

Woodn recommends to refer only to the values expressed in mm - the US values are to be considered approximate).



profile code	reinforcement dimensions [ft, in]	side [ft, in]	maximum horizontal span [inch]		maximum vertical span [inch]	
			aluminum	steel	aluminum	steel
TZ9555	80 x 40 x 2 mm ($\approx 3\frac{3}{16} \times 1\frac{5}{8} \times 5/64$)	$\approx 3\frac{3}{4}$	≈ 134 "	≈ 157 "	≈ 134 "	≈ 173 "
		$\approx 2\frac{3}{16}$	≈ 102 "	≈ 118 "		
TZ9555-R	40 x 40 x 2 mm ($\approx 1\frac{5}{8} \times 1\frac{5}{8} \times 5/64$)	$\approx 3\frac{3}{4}$	≈ 98 "	≈ 114 "	≈ 118 "	≈ 153 "
		$\approx 2\frac{3}{16}$	≈ 94 "	≈ 110 "		

Maximum spans calculated considering:

- maximum permanent deformation due to own weight 1/8"
- maximum non-permanent deformation 1" 3/16 considering a standard wind load of 30.73 pound/ft²